




RECOMMENDED MOUNTING HOLE Ø		
Limit	Inch	mm
MIN	.502	12.751
MAX	.504	12.802

MAXIMUM CLAMPING TORQUE**		
Thread Type	Inch lbf	Nm
LUBRICATED	47.5	5.4

- NOTES:
1. BUSHING IS IMPREGNATED WITH CARTER STANDARD NEVERLUBE LUBRICANT
 2. ALL EXPOSED SURFACES HAVE BLACK OXIDE
 3. CUSTOM LASER ETCHING IS AVAILABLE UPON REQUEST

DRAWING NO.

SFHE-28-A

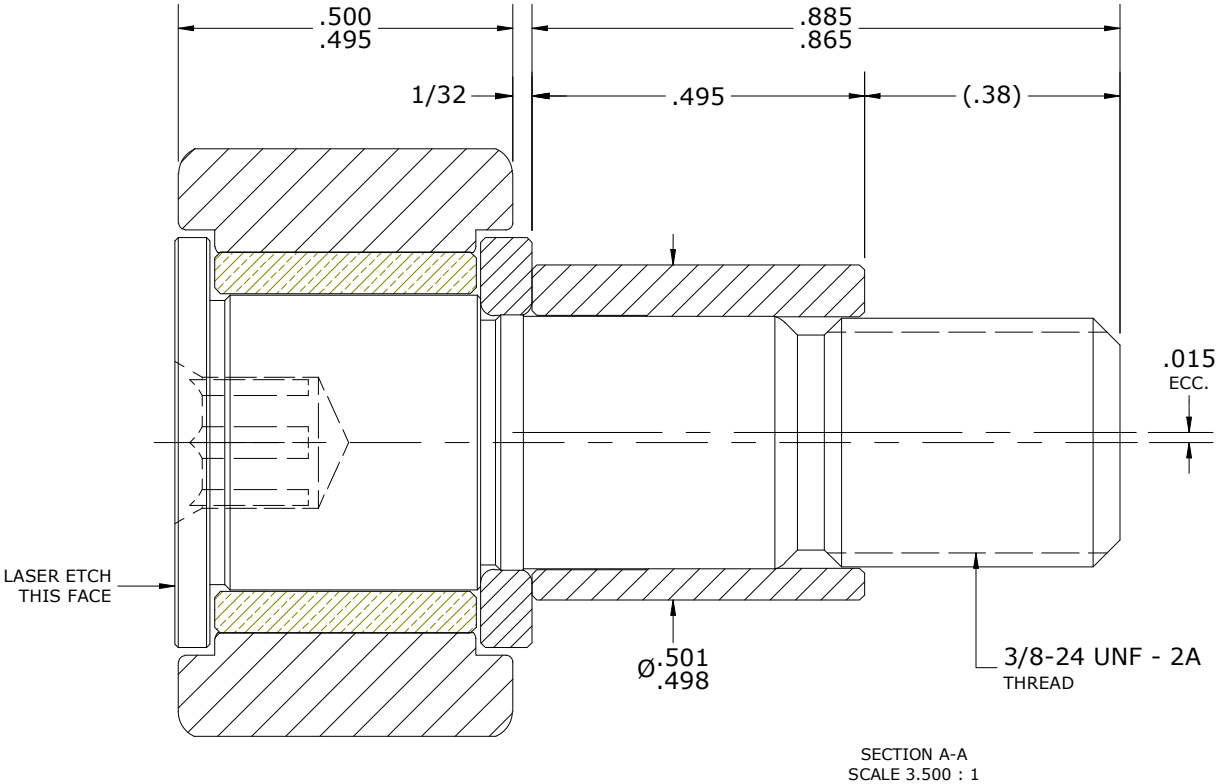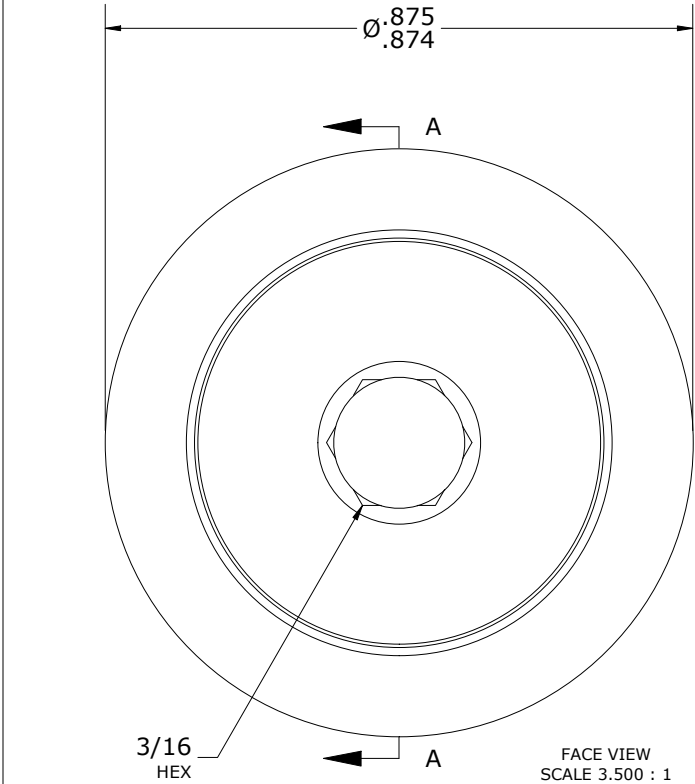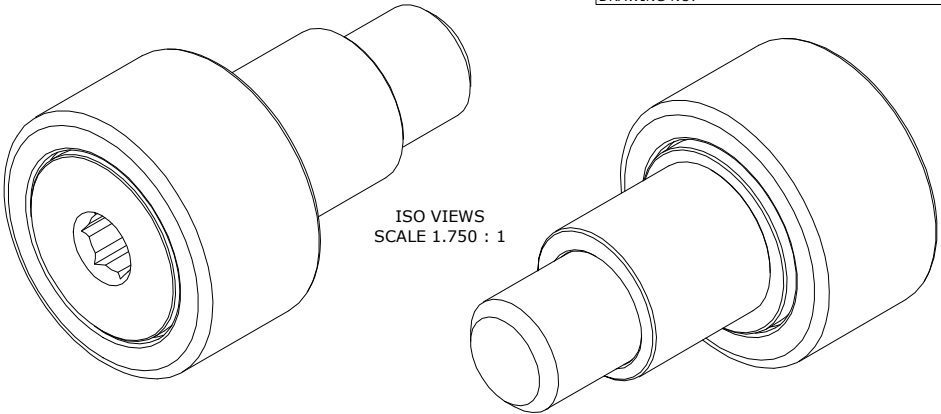

**(TORQUE SPECIFICATION IS BASED ON LUBRICATED THREADS, IF USING DRY THREADS DOUBLE TORQUE VALUE)

MATERIAL NOTES:	CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH [METRIC] FRACTION = ± 1/64	CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS		CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417					
OUTER RING - BEARING STEEL, HEAT TREATED			REVISION		PART NAME: ASSEMBLY			PRODUCT TYPE: Standard CF/YR		
STUD - STEEL	ENGINEERING CHANGE ORDER NOTE		B	AUTHOR BY	DRAWN BY	CHK'D BY	SALES		MATERIAL	
WASHER - BEARING STEEL, HEAT TREATED				HG	SGW	MD	KR		NOTED	
ECCENTRIC SLEEVE - STEEL	CARTER STANDARD SURFACE FINISH IS MEASURED IN "Ra" UNITS UNLESS OTHERWISE SPECIFIED.		REVISION BY	DATE	DATE	DATE	DATE	SHEET		
BUSHING - SINTERED BRONZE			DJB	9/12/2023	5/4/2017	9/12/2023	5/5/2017	1 OF 2		